Environmental Status Report For Kudag Bauxite Mine at

Post & Teh.: Samri, (Kusmi)

Dist: Balrampur-Ramanujganj(C.G.)

#### Duration: October-November-December-2018

Name of Industry



M/s. Hindalco Industries Limited.,

Name of Laboratory:-



QCI-NABET Accredited EIA Consultant
MoEF&CC (GOI) and NABL Recognized Laboratory
ISO 9001:2008, ISO 14001:2004, OHSAS 18001:2007
60, Bajiprabhu Nagar, Nagpur - 440 033, MS
Lab & Consultancy: FP-34, 35, Food Park,
MIDC, Butiberi, Nagpur - 441122
Ph.: (0712) 2242077, 9373287475

Email: info@anacon.in, ngp@anacon.in website: www.anaconlaboratories.com

Rupambeth

Agent of Mines
Samri Mines Division
Hindalco Industries Ltd.

Foreword

The protection of environment plays a crucial role in maintaining the local environment

quality for any mining industry. Hence compliance of the statutory requirements

becomes very important to conserve the ecological balance within and surrounding the

mine area. Therefore, environment protection is becoming a pre requisite for sustainable

development. In line with this requirement, the management of M/s Hindalco

Industries Ltd. has adopted a corporate responsibility of environment protection.

In order to comply with the Environment protection act, to fulfill statutory requirement

and to be in tune with Environmental Preservation and sustainable development, M/s

Hindalco Industries Ltd. has retained ANACON LABORATORIES PVT. LTD.,

Nagpur as Environment Consultants and for various Environmental issues related to

their mines.

This report presents the Environmental Status for the period October-2018 to

December-2018 as compliance to the statutory requirements.

The co-operation extended by the Staff and Management of M/s Hindalco Industries

Ltd. during the work execution period is gratefully acknowledged.

for ANACON LABORATORIES PVT. LTD.

Place: Nagpur

Date : December, 2018

Authorized Signatory

#### 1.1 Introduction

**Hindalco Industries Limited (Hindalco)** is one among the flagship companies of the Aditya Birla Group of Industries and is one of the largest corporate groups in India. This group is a leading manufacturer of Aluminum in India, having integrated facilities encompassing bauxite, mining, refining and smelting to achieve Aluminum.

Various processing units of Hindalco are strategically located in different parts of the nation to achieve optimum benifits. Over the past few decades the group has grown multifold in its production capacities, product mix and diversification in mining. The Chhattisgarh Environment Conservation Board (CECB) granted permission for establishing the Bauxite Mine to Hindalco at block Tatijharia, Kudag and Samri mines in Balrampur District of Chhattisgarh State.

HINDALCO INDUSTRIES LTD., awarded the work to M/s ANACON LABORATORIES PVT. LTD. Nagpur (ALPL) for carrying out Environmental monitoring of parameters for assessing pollution levels and preparation of monthly reports (October-November-December-2018) as per the requirement of Chhattisgarh Environment Conservation Board (CECB) and Ministry of Environment and Forest (MoEF) for Kudag mining lease in Balrampur District, Chhattisgarh State.

#### 1.2 Background Information of Kudag Mine

Hindalco was granted Kudag Bauxite mining lease over an area of 377.116 hec. in Kudag village in Post office Dumarkholi, Tehsil Samri(Kusmi) of Balrampur district, Chhattisgarh on 24/12/1996 for a period of 20 years. As per the Mines and Mineral (Development and Regulation) Amendment Act, 2015, Kudag lease has been extended up to another 30 years i.e 23/12/2046. The mining operations were started on 02/07/1997. The production capacity of Bauxite is 0.6 Lakh Tonnes Per Annum (LTPA).

#### 1.3 Salient Features of Kudag Bauxite Mine

The deposits occur in Kudag block, Post office Dumarkholi Tehsil Samri(Kusmi) of Balrampur district. This deposit has been identified as one of the resources to cater the raw material requirements of the Hindalco Alumina refinery at Renukoot, Uttar Pradesh. The salient features of the project are presented below: ( Table 1).

<u>Table 1</u>

Salient Features of Kudag Bauxite Mines

S.No.	Particulars	Details
1.	Survey of India Toposheet No.	64 M /15
2.	Latitude	23° 26′ 02″N to 23° 29′ 00″N
3.	Longitude	83° 51′ 00"E to 83° 59′ 00"E
4.	Elevation	1145-m above Mean Sea Level
5.	Climatic Conditions (as per IMD, Ambikapur)	Annual maximum temperature: 30.3°C Annual minimum temperature: 17.7°C Average annual rainfall: 1401.1 mm
6.	Mining lease area	377.116 Hec.
7.	Method of mining	Open cast (Semi-Mechanized)
8.	Mode of transportation	Trucks
9.	Landuse	Agricultural and Barren land
10.	Nearest Road	Samri to Kusmi (17 km)
11.	Nearest Airport	Ranchi Airport (151.09 Km)
12.	Nearest Town	Ambikapur (127 km, SW)

#### 1.4 Environmental Monitoring

Regular monitoring of environmental parameters is of immense importance to assess the status of environment during mining operation. With the knowledge of baseline conditions, the monitoring program will serve as an indicator for any deterioration in environmental conditions due to mining operation of the project. Suitable mitigation steps will be taken in time to safeguard the environment based on monitoring reports. Monitoring is important in the control of pollution since the efficiency of control measures can only be determined by monitoring.

In order to find out the impact of mining activity on sensitive receptors, it is necessary to monitor Environmental Quality to know the level of concentrations of pollutants within and around the mining lease area. Accordingly Hindalco Industries through ALPL has been monitoring air, water and noise quality on monthly basis during these months (Table-2).



#### Details of Salient Features

#### 1.5 Air Environment

#### 1.5.1 Ambient Air Quality Monitoring

Ambient Air Quality and Fugitive emission monitored at 8 following locations with reference to Kudag mine lease area shown in (Fig.-1).

#### Table 2

### Locations of Ambient Air Quality Monitoring (AAQM) (377.116 hec.)

Core Zone	Sr.	Buffer Zone	
Sairaidh Campus	5	Jaljali Village	
New Kudag/Nr.Weigh Bridge	6	Kutku Village	
Old Kudag/Mining Area	7	Rajendrapur	
Samri Gopatu/Nr. Weigh Bridge	8	Tatijharia Village	
	Sairaidh Campus New Kudag/Nr.Weigh Bridge Old Kudag/Mining Area	Sairaidh Campus 5 New Kudag/Nr.Weigh Bridge 6 Old Kudag/Mining Area 7	Sairaidh Campus 5 Jaljali Village New Kudag/Nr.Weigh Bridge 6 Kutku Village Old Kudag/Mining Area 7 Rajendrapur

The sampling stations are selected at the above mentioned locations, in downwind and upwind directions of the mining site. ALPL is carrying out regular monitoring for PM<sub>10</sub>, PM<sub>2.5</sub>, SO<sub>2</sub>, NO<sub>x</sub> and Pb, Hg, As and Cr at above Ambient Air Quality Monitoring (AAQM) locations. The dust fall rate was measured in the mining area and Khaskudag during October-November-December-2018. The AAQM sampling sites are selected considering seasonal variation in wind speed and wind direction.

#### Sampling Duration and Frequency

Ambient air quality monitoring was carried out for the parameters  $PM_{10}$ ,  $PM_{2.5}$ ,  $SO_2$ ,  $NO_x$  and Pb, Hg, As and Cr from October-November-December-2018 as per CPCB norms.

Data is compared with the standards mentioned in the Gazette Notification of the Central Pollution Control Board (CPCB) (Nov-18, 2009) and as per consent conditions mentioned in consent letter.



#### Details of Salient Features

1.6 Meteorology: Wind Pattern

Meteorology: Wind Pattern

The data of wind pattern collected during the study period (Oct-Nov-Dec 2018) indicates that the wind was blowing predominately from (SSW and SW) directions, during study period, for 0.46% wind was found to be calm.

Wind Frequency Distribution Data

Sr.	Directions / Wind	0.5 -	2.1 -	3.6 -	5.7 -	8.8 -	>=	Total (%)
No.	Classes (m/s)	2.1	3.6	5.7	8.8	11.1	11.1	
1	348.75 - 11.25	0.25445	1.01781	0.35623	0.15267	0	0	1.78117
2	11.25 - 33.75	0.30534	1.01781	0.20356	0	- 0	0	1.52672
3	33.75 - 56.25	1.42494	2.44275	0.91603	0	0	0	4.78372
4	56.25 - 78.75	1.57761	3.46056	0.91603	0	0	0	5.9542
5	78.75 - 101.25	1.42494	2.34097	0.25445	0	0	0	4.02036
6	101.25 - 123.75	2.03562	2.44275	0.20356	0	0	0	4.68193
7	123.75 - 146.25	2.59542	2.1883	0.61069	0.10178	0	0	5.49618
8	146.25 - 168.75	3.10433	2.90076	0.66158	0	0	0	6.66667
9	168.75 - 191.25	5.64885	3.96947	0.20356	0	0	0	9.82188
10	191.25 - 213.75	8.85496	5.54707	0.30534	0	0	0	14.7074
11	213.75 - 236.25	6.31043	6.87023	0.81425	0.05089	0	0	14.0458
12	236.25 - 258.75	2.6972	3.71501	0.86514	0	0	. 0	7.27735
13	258.75 - 281.25	1.17048	3.66412	1.52672	0	0	0	6.36132
14	281.25 - 303.75	0.76336	3.10433	1.17048	0	0	0	5.03817
15	303.75 - 326.25	0.71247	1.88295	1.11959	0.30534	0	0	4.02036
16	326.25 - 348.75	0.61069	2.03562	0.66158	0.05089	0	0	3.35878
	Sub-Total	39.4911	48.6005	10.7888	0.6615	0	0	99.542
	Calms					1		0.45802
	Missing/Incomplete							0
	Total				THE LEE			100
								200

Summary of Wind Pattern

Season	First Predominant Wind Direction	Second Predominant Wind Direction	Calm Condition
Oct-Nov-Dec 2018	SSW (14.7%)	SW (14.0%)	0.46%



#### Details of Salient Features

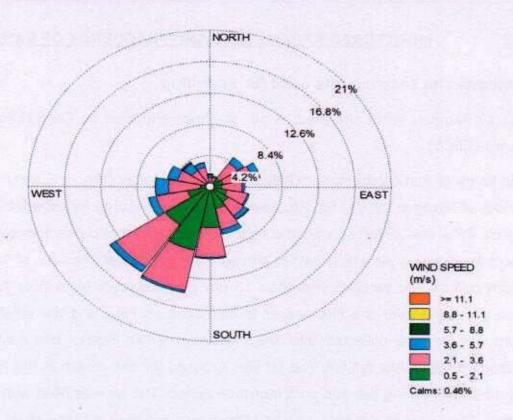


Figure.02: Wind Rose Diagram (Oct-Nov-Dec-2018)



Details of Salient Features

#### 1.7 MONITORED PARAMETERS AND FREQUENCY OF SAMPLING

#### Methods and Instruments used for Sampling

The air samples were analyzed as per methods specified by Central Pollution Control Board (CPCB).

The levels of Particulate Matter ( $PM_{10}$ ), Particulate Matter ( $PM_{2.5}$ ), Sulphur Dioxide ( $SO_2$ ), Oxides of Nitrogen ( $NO_x$ ), Pb, Hg, As and Cr were monitored for establishing the baseline status.  $PM_{10}$  was collected with the help of Respirable Particulate Sampler operating 24 hours by drawing air which passes through the cyclone at the rate of 1.0–1.3 m³/min which collects the particles less than 10 µm diameter over glass fiber filter paper. The dust deposited over the filter paper is measured as  $PM_{10}$  and the smaller particulates from 2.5 µm are collected into the Membrane Filter Paper. The dust fall rate was measured using dust fall jar. The jar was exposed for one month in the mining area and Samri Chowk during pre and post monsoon period. The jar was filled with 2 lit of distilled water. The water in the jar is mixed with copper sulphate solution (0.02 N solutions) to prevent any growth of algae. The water level in the jar is constantly maintained in such a way that 2 lit of water is always retained. The measurement techniques used for various pollutants and other details are given in **(Table 3)**.

Earmarked samples were collected for Particulate Matter-PM<sub>10</sub>, Particulate Matter-PM<sub>2.5</sub>, SO<sub>2</sub> and NOx for 24 hourly. Collected samples were sent to Laboratories for analysis.



Details of Salient Features

### Table 3.0 Measurement Techniques for various pollutants

S.No.	Parameter	Technique	Technical Protocol	Minimum Reportable Value (µg/m³)
1.	Respirable Particulate Matter	Respirable Dust Sampler (Gravimetric Method)	IS-5182 (Part-23)	5
2.	Particulate Matter 2.5	Respirable Dust Sampler (Gravimetric Method)	Gravimetric Method	5
3.	Sulphur Dioxide	Modified West and Gaeke	IS-5182 (Part - II)	4
4.	Oxide of Nitrogen	Jacob & Hochheiser Method	IS-5182 (Part - VI)	4
5.	Pb, As,Hg, Cr	Acid Digestion Method	EPA Method	0.1
6.	Dust Full	Gravimetric	IS-5182 (Part-I)	



#### Details of Salient Features

#### <u>Table 4</u> <u>Statistical Analysis</u>

Location	Month & Year	PM-10 (μg/m <sup>3</sup> )	PM-2.5 (μg /m <sup>3</sup> )	SO <sub>2</sub> (μg /m <sup>3</sup> )	NO <sub>x</sub> (μg /m <sup>3</sup> )	<b>Pb</b> (μg /m <sup>3</sup> )	Hg (μg/m <sup>3</sup> )	As (ng/m <sup>3</sup> )	Cr (µg/m <sup>3</sup>
Core Zone						12 12			
	October-2018	61.9	27.4	9.3	21.8	0.018	ND	ND	ND
Sairaidh Campus	November-2018	57.3	26.4	11.6	23.9	0.029	ND	ND	ND
	December-2018	61.8	23.6	11.7	26.1	0.027	ND	ND	ND
New Kudag/Nr.	October-2018	67.1	31.8	11.6	27.3	0.024	ND	ND	ND
Weigh Bridge	November-2018	63.7	28.7	12.8	24.1	0.037	ND	ND	ND
	December-2018	64.9	26.1	13.8	31.6	0.019	ND	ND	ND
Old Kudag/Mining Area	October-2018	71.6	32.9	13.4	31.9	0.027	ND	ND	ND
	November-2018	67.1	32.8	12.9	26.4	0.034	ND	ND	ND
	December-2018	68,1	27.9	12.4	28.1	0.024	ND	ND	ND
	October-2018	67.3	31.9	12.8	26.4	0.046	ND	ND	ND
Samri Gopatu/	November-2018	76.1	32.9	13.8	28.6	0.053	ND	ND	ND
Nr. Weigh Bridge	December-2018	64.3	21.8	9.4	27.1	0.039	ND	ND	ND
CPCB St	andards	100 (24 hrs)	60 (24 hrs)	80 (24 hrs)	80 (24 hrs)	1.0 (24 hrs)	-	6.0 (annual)	
Mini	mum	57.3	21.8	9.3	21.8	0.018			-
Maxin	mum	76.1	32.9	13.8	31.9	0.053			
Aver	rage	65.9	28.7	12.1	26.9	0.031			
98%	o le	75.1	32.9	13.8	31.8	0.051			

- The Average Concentration of PM10 within the Core Zone of Kudag Lease is 65.9 μg/m³.
- The Average Concentration of PM<sub>2.5</sub> within the Core Zone of Kudag Lease is 28.7 μg/m<sup>3</sup>.
- The Average Concentration of SO<sub>2</sub> within the Core Zone of Kudag Lease is 12.1 μg/m<sup>3</sup>.
- The Average Concentration of NOx within the Core Zone of Kudag Lease is 26.9 μg/m³.
- The Average Concentration of Pb within the Core Zone of Kudag Lease is 0.031 μg/m³.

Conclusion: The Average Concentration within the Core Zone of Kudag Lease during this period (Oct-Nov-Dec-2018) it is within permissible limits as per CPCB Standards.



#### Details of Salient Features

Location	Month & Year	PM-10 (μg/m <sup>3</sup> )	PM-2.5 (μg/m <sup>3</sup> )	SO <sub>2</sub> (μg /m <sup>3</sup> )	NO <sub>x</sub> . (μg /m <sup>3</sup> )	Pb (μg /m <sup>3</sup> )	Hg (μg /m <sup>3</sup> )	As (ng/m <sup>3</sup> )	Cr (µg/m <sup>3</sup>
Buffer Zone									
AND	October-2018	57.3	24.9	7.3	18.1	0.014	ND	ND	ND
Jaljali Village	November-2018	53.1	17.3	8.4	19.6	0.021	ND	ND	ND
	December-2018	57.2	19.4	7.3	17.8	0.016	ND	ND	ND
in Salara	October-2018	56.3	21.7	8.2	23.6	0.026	ND	ND	ND
Kutku Village	November-2018	61.7	24.6	9.7	21.8	0.031	ND	ND	ND
	December-2018	53.7	16.4	6.9	18.3	0.024	ND	ND	ND
Rajendrapur	October-2018	62.9	28.4	9.4	24.7	0.037	ND	ND	ND
	November-2018	68.3	27.4	11.3	26.9	0.047	ND .	ND	ND
7/5	December-2018	57.1	18.6	8.2	24.9	0.027	ND	ND	ND
	October-2018	73.8	32.7	14.7	31.9	0.062	ND	ND	ND
Tatijharia Village	November-2018	64.7	31.6	12.8	26.1	0.048	ND	ND	ND
	December-2018	76.1	34.7	14.9	32.8	0.053	ND	ND	ND
CPCB St	andards	100 (24 hrs)	60 (24 hrs)	80 (24 hrs)	80 (24 hrs)	1.0 (24 hrs)		6.0 (annual)	
Minir	num	53.1	16.4	6.9	17.8	0.014			
Maxin	num	76.1	34.7	14.9	32.8	0.062			
Avei	age	61.9	24.8	9.9	23.9	0.034	12210	222	
98%	le	75.6	34.3	14.9	32.6	0.060			

- The Average Concentration of PM10 within the Buffer Zone of Kudag Lease is 61.9 μg/m<sup>3</sup>.
- The Average Concentration of PM25 within the Buffer Zone of Kudag Lease is 24.8 μg/m³.
- The Average Concentration of SO<sub>2</sub> within the Buffer Zone of Kudag Lease is 9.9 μg/m<sup>3</sup>.
- The Average Concentration of NOx within the Buffer Zone of Kudag Lease is 23.9 µg/m³.
- The Average Concentration of Pb within the Buffer Zone of Kudag Lease is 0.034 µg/m³.

Conclusion: The Average Concentration within the Buffer Zone of Kudag Lease during this period (Oct-Nov-Dec-2018) it is within permissible limits as per CPCB Standards.



Details of Salient Features

#### Monthwise Summary of Statistical Analysis

#### Kudag Lease (Core Zone):-

#### 3.1 Ambient Air Quality:

Ambient air quality has been generated as per NAAQS 2009 for the month of October-2018 to December-2018. PM10, PM2.5, SO<sub>2</sub> & NO<sub>x</sub>, The values obtained were then compared vis-a-vis the standards prescribed by CPCB for Industrial/ Rural / Residential uses.

#### 3.1.1 Presentation of Results:

The summary of Ambient Air Quality monitoring results from October-2018 to December-2018 are presented in detail in Table 4.0. 98th percentile; maximum and minimum values etc. have been computed from the collected raw data for all the AAQ monitoring station. The data has been compared with the standards prescribed by Central Pollution Control Board (CPCB)/NAAQS for residential and rural zone.

#### A. Particulate Matter-PM<sub>10</sub>:

The Minimum and maximum concentrations for Particulate Matter-PM $_{10}$  were recorded as 57.3  $\mu g/m^3$  and 76.1  $\mu g/m^3$  at Sairaidh Campus and Samri-Gopatu respectively. The average concentrations 65.9  $\mu g/m^3$ .

#### B. Particulate Matter-PM<sub>2.5</sub>:

The Minimum and maximum concentrations for Particulate Matter-PM<sub>2.5</sub> were recorded as 21.8μg/m<sup>3</sup> & 32.9μg/m<sup>3</sup> at Samri Gopatu and Old Kudag site respectively. The average concentrations 28.7 μg/m<sup>3</sup>.

#### C. Sulphur Dioxide (SO<sub>2</sub>):

The minimum and maximum for  $SO_2$  concentrations were recorded as  $9.3\mu g/m^3$  and  $13.8\mu g/m^3$  respectively. The minimum concentration was recorded at Saraidih Campus.The maximum concentration was also recorded at New Kudag. The average concentrations  $12.1 \ \mu g/m^3$ .



#### Details of Salient Features

#### Nitrogen Oxide (NO<sub>x</sub>):

The minimum and maximum for NO<sub>X</sub> concentrations were recorded as 21.8µg/m<sup>3</sup> and 31.9µg/m<sup>3</sup>. The maximum concentration was recorded at Old Kudag and the minimum concentration was recorded at Saraidih Campus. The average concentrations 26.9µg/m<sup>3</sup>.

#### D. Lead (Pb):

Maximum Lead detected in PM<sub>10</sub> samples was 0.053µg/m³ Samri-Gopatu location and the minimum lead in PM<sub>10</sub> sample was 0.018/m³ detected at Sairaidh Campus location.

No lead could be detected in PM<sub>2.5</sub> samples at any of the Ambient Air samples at any of the locations.

#### E. Mercury (Hg):


Mercury was not detected at any of the locations in PM<sub>10</sub> samples as well as PM<sub>2.5</sub> Samples.

#### F. Arsenic (As):


Arsenic was not detected at any of the locations in PM<sub>10</sub> samples as well as PM<sub>2.5</sub> Samples.


#### G. Chromium (Cr):


Chromium was not detected at any of the locations in PM<sub>10</sub> samples as well as PM<sub>2.5</sub> Samples.

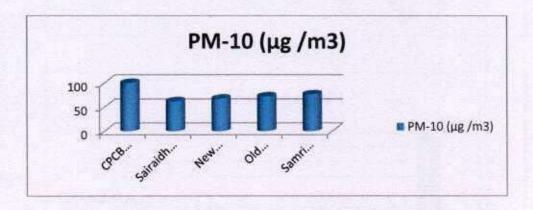


#### Details of Salient Features

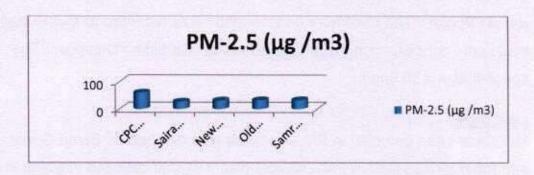

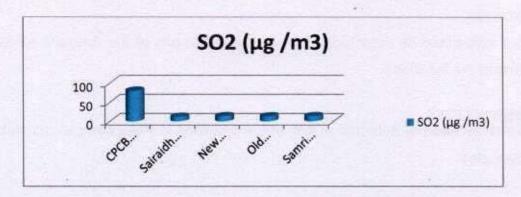


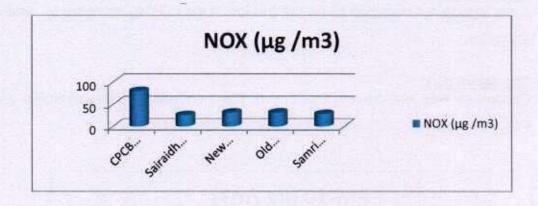

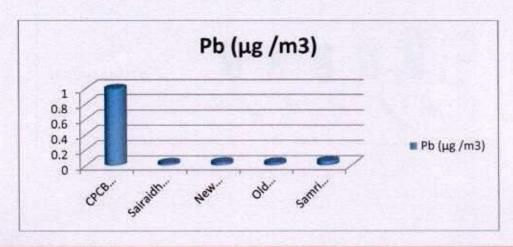



#### Details of Salient Features

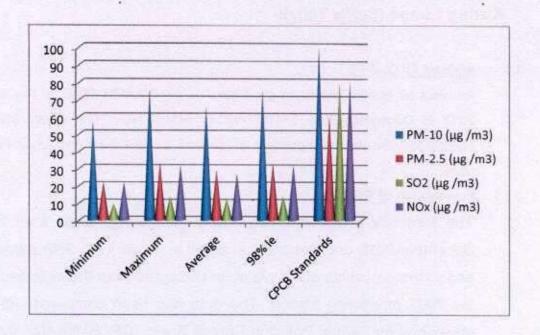



Details of Salient Features

#### Kudag Lease (Buffer Zone):-

#### 3.2 Ambient Air Quality:

Ambient air quality has been generated as per NAAQS 2009 for the month of October-2018 to December-2018. PM10, PM2.5, SO<sub>2</sub> & NO<sub>X</sub>, The values obtained were then compared vis-a-vis the standards prescribed by CPCB for Industrial/ Rural / Residential uses.

#### 3.2.1 Presentation of Results:

The summary of Ambient Air Quality monitoring results from October-2018 to December-2018 are presented in detail in Table 4.0. 98th percentile; maximum and minimum values etc. have been computed from the collected raw data for all the AAQ monitoring station. The data has been compared with the standards prescribed by Central Pollution Control Board (CPCB)/NAAQS for residential and rural zone.

#### H. Particulate Matter-PM<sub>10</sub>:

The Minimum and maximum concentrations for Particulate Matter- $PM_{10}$  were recorded as 53.1  $\mu g/m^3$  and 76.1  $\mu g/m^3$  at Jaljali Village and Tatijharia respectively. The average concentrations 61.9  $\mu g/m^3$ .

#### I. Particulate Matter-PM2.5:

The Minimum and maximum concentrations for Particulate Matter-PM<sub>2.5</sub> were recorded as 16.4μg/m<sup>3</sup> & 34.7μg/m<sup>3</sup> at Kutku Village and Tatijharia Village site respectively. The average concentrations 24.8 μg/m<sup>3</sup>.

#### J. Sulphur Dioxide (SO<sub>2</sub>):

The minimum and maximum for  $SO_2$  concentrations were recorded as  $6.9\mu g/m^3$  and  $14.9\mu g/m^3$  respectively. The minimum concentration was recorded at Kutku Village. The maximum concentration was also recorded at Tatijharia Village. The average concentrations  $9.9 \ \mu g/m^3$ .



#### Details of Salient Features

#### Nitrogen Oxide (NO<sub>x</sub>):

The minimum and maximum for NO<sub>X</sub> concentrations were recorded as 17.8µg/m<sup>3</sup> and 32.8µg/m<sup>3</sup>. The maximum concentration was recorded at Tatijharia Village and the minimum concentration was recorded at Jaljali Village. The average concentrations 23.9µg/m<sup>3</sup>.

#### K. Lead (Pb):

Maximum Lead detected in PM<sub>10</sub> samples was 0.062µg/m<sup>3</sup> Tatijharia Village location and the minimum lead in PM<sub>10</sub> sample was 0.014/m<sup>3</sup> detected at Jaljali Village location.

No lead could be detected in PM<sub>2.5</sub> samples at any of the Ambient Air samples at any of the locations.

#### L. Mercury (Hg):


Mercury was not detected at any of the locations in PM<sub>10</sub> samples as well as PM<sub>2.5</sub> Samples.

#### M. Arsenic (As):

Arsenic was not detected at any of the locations in PM<sub>10</sub> samples as well as PM<sub>2.5</sub> Samples.


#### N. Chromium (Cr):


Chromium was not detected at any of the locations in PM<sub>10</sub> samples as well as PM<sub>2.5</sub> Samples.

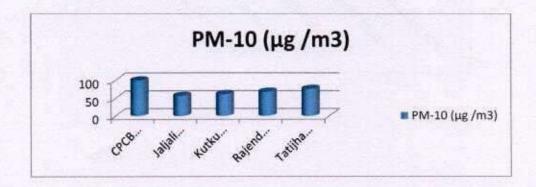




#### Details of Salient Features

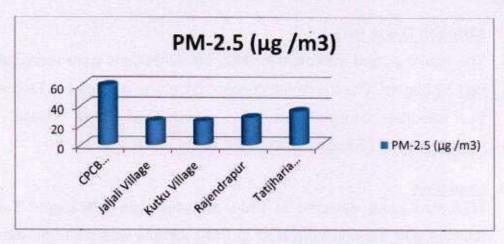


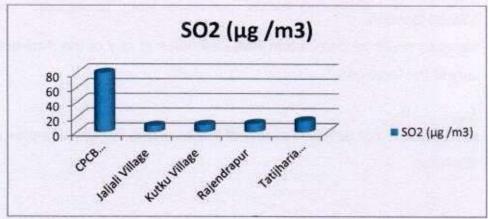


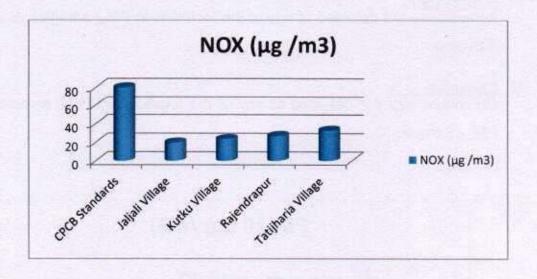



#### Details of Salient Features

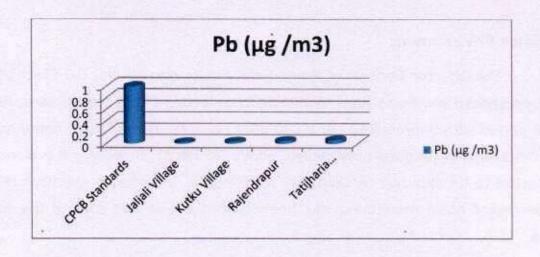

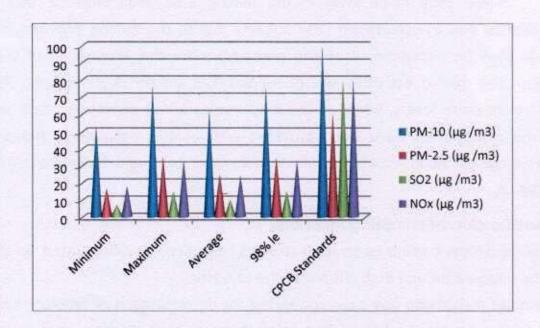



Details of Salient Features

#### 1.8 Noise Environment

The Director General of Mines Safety in its circular No. DG (Tech)/18 of 1975, has prescribed the noise level in mining occupations (TLV) for workers, in an 8 hour shift period with unprotected ear as 90 dB(A) or less. There will be some noise sources in mines, which produce noise levels above 90 dB(A), however; the workers are not expected to be exposed continuously for 8 hours. In order to maintain this statutory requirement noise monitoring has been carried out in and around the mining lease area:

Work zone noise level in the mining area shall increase due to blasting excavation and transportation. The impacts due to the mining activities on the noise levels shall be negligible, if all the precautions for the elimination of the noise are taken. The mining activities will be undertaken during daytime only. The daytime equivalent noise levels, when all the machineries are in operation, shall be minimized as the machineries have been provided with control equipment. Noise monitoring carried out on monthly basis at mining site; Core Zone and Buffer Zone are as shown in **Fig. 3**.

#### Identification of sampling locations

Noise at different noise generating sources has been identified based on the activities in the village area and ambient noise due to traffic.

The noise monitoring has been conducted for determination of ambient noise levels in the mining area and villages. The noise levels at each location were recorded for 24 hours.

#### Instrument used for monitoring

Noise levels were measured using integrated sound level meter manufactured by Envirotech made in India (Model no. HTC-1352). This instrument is capable of measuring the Sound Pressure Level (SPL), Leq.

#### Method of Monitoring

Sound Pressure Level (SPL) measurements were monitored at eight locations. The readings were taken for every hour for 24 hours. The day noise levels have been monitored during 6 am to 10 pm and night levels during 10 pm to 6 am at eight locations within 10-km radius of the study area.



#### Details of Salient Features

Noise level monitoring was carried out continuously for 24 hours with one hour interval starting at 06.00 hrs to 06.00 hrs next day.

Noise levels monitored during day and night at Four locations are found to be below in the Mining Area than the stipulated standard of CPCB for Industrial area as 75dB(A) and 70dB(A) for day and night respectively as given in (Table 5).

Table 5
Noise Emission Monitoring Report

CR NO	LOCATION		Noise	-dB(A)
SR. NO.	LOCATION	Month	Day Time	Night Time
Core Zone				
		October-2018	64.7	56.1
1.	Sairaidh Campus	November-2018	58.2	46.1
		December-2018	54.7	46.2
	New Yerds Ole Missel	October-2018	68.1	57.3
2.	New Kudag/Nr. Weigh	November-2018	61.7	54.9
	Bridge	December-2018	58.3	49.1
		October-2018	71.3	62.1
3.	Old Kudag/Mining Area	November-2018	64.9	56.7
		December-2018	61.4	52.8
	Samuel Camara Nia Wai ah	October-2018	54.9 -	42.8
4.	Samri Gopatu/Nr.Weigh	November-2018	53.8	42.6
	Bridge	December-2018	47.1	38.6
Buffer Zoi	ne			
	Jaljali Village	October-2018	52.9	41.6
1.		November-2018	54.2	43.8
		December-2018	47.6	37.2
		October-2018	61.8	46.7
2.	Kutku Village	November-2018	52.8	41.6
		December-2018	52.7	42,6
		October-2018	67.3	56.1
3.	Rajendrapur	November-2018	56.9	52.7
		December-2018	56.4	48.3
		October-2018	72.1	62.9
4.	Tatijharia Village	November-2018	64.7	51.9
		December-2018	68.1	57.2
CPCB Star	ndards			
Industrial	Area		75	70
Residentia	al area		55	45

<u>Conclusion</u>:- The Noise Monitoring Results Samri Lease during this period (Oct-Nov-Dec-2018 ) it is within permissible limits as per CPCB Standards.



#### Details of Salient Features

#### Table 5-A

#### **HEMM Spot Noise Level Monitoring**

Unit: dB(A) Leq

Sr.	Location	October-2018		18	November-2018			December-2018		
No.	Location	Min.	Max.	Avg.	Min.	Max.	Avg.	Min.	Max.	Avg.
1	New Kudag/Nr.Weigh Bridge	64.7	72.6		67.1	74.2		68.3	81.9	

#### Free Silica :-

Sr. No.	Location	Measurement Unit	Octob	er-2018	Novem	ber-2018	Decem	ber-2018
			SPM	RSPM	SPM	RSPM	SPM	RSPM
1.	Sairaidh Campus	g/100gm	0.18	0.06	0.21	0.17	0.21	0.13
2.	New Kudag/Nr. Weigh Bridge	g/100gm	0.27	0.09	0.34	0.21	0.26	0.18
3.	Old Kudag/Mining Area	g/100gm	0.31	0.12	0.31	0.18	0.28	0.19
4.	Jaljali Village	g/100gm	0.13	0.04	0.16	0.09	0.14	0.07

#### Table 6

#### **Dust fall Rate**

Sr. No.	Location	October- 2018	November- 2018	December- 2018	Average			
		Rate (MT/km²/Month)						
1.	Sairaidh Campus	14.52	16.24	14.59	15.12			
2.	New Kudag/Nr. Weigh Bridge	21.48	23.59	19.27	21.45			
3.	Old Kudag/Mining Area	17.24	21.58	16.52	18.45			



#### Details of Salient Features

#### 2.0 Water Quality Monitoring

The existing status of water quality for ground water and surface water was assessed by collecting the water samples from underground wells from the mining area/old kudag.

The purpose of the study is to assess the water quality characteristics for critical parameters, evaluate the impacts on agricultural productivity, habitat conditions, recreational resources and aesthetics in the vicinity and identification of impact on water quality by this project and related activities.

The physico-chemical analysis of water samples collected during the study period is given in **(Table7)**. The overall water quality found to be below the stipulated standards of IS 10500-2012 for ground water & found to be fit for drinking purpose for tested parameters. Thus the impacts due to mining activities have been found to be insignificant.

The drinking water is supplied by the tankers from for away sources. Hence, additional care now be taken to chlorinate the tankers before leaving the supply source.

The water sample from Nallahs near Mines Area was collected to know its chemical characteristics in order to find out the use of water for various utilities in the mine area As per IS: 10500:2012 for surface water results are within the permissible limit so that the water can be used after chlorination.

The drinking water is supplied by the tankers from far away sources. Hence, additional care now be taken to chlorinate the tankers before leaving the supply source.



#### Details of Salient Features

## Table 7 Report on Chemical Examination of Ground Water (Average of Three Months October-November-December-2018)

Location:	GW1) Saraidih (Hindalco Campus)	1110
Location:	Sample Source:- Borewell Water	

#### TEST RESULTS

C- N-	Test Parameter	Measurement Unit		As per IS 10500 : 2012 (Drinking Water - Specification)		
Sr. No.			Test Method	Acceptable Limit	*Permissible Limit	Test Result
1.	pH value	0 - 0 -	IS 3025 (Part 11)	6.5 to 8.5	No relaxation	7.26 at 25°C
2.	Turbidity	NTU	IS 3025 (Part 10)	1	5	0.8
3.	Colour	Hazen units	IS 3025 (Part 4)	5	15	1
4.	Odour	-	IS 3025 (Part 5)	Agreeable	Agreeable	Agreeable
5.	Taste	ANICH STATE	IS 3025 (Part 8)	Agreeable	Agreeable	Agreeable
6.	Iron (as Fe)	mg/l	IS 3025 (Part 2)	1.0	No relaxation	0.17
7.	Free residual chlorine	mg/l	IS 3025 (Part 26)	Min. 0.2	1	< 0.1
8.	Total dissolved solids	mg/I	IS 3025 (Part 16)	500	2000	457
9.	Fluoride (as F)	mg/l	IS 3025 (Part 60)	1.0	1.5	0.26
10.	Cyanide (as CN)	mg/l	IS 3025 (Part 27)	0.05	No relaxation	< 0.005
11.	Chloride (as CI)	mg/l	IS 3025 (Part 32)	250	1000	36.9
12.	Total Alkalinity (as CaCO <sub>3</sub> )	mg/l	IS 3025 (Part 23)	200	600	127.4
13.	Total hardness (as CaCO <sub>3</sub> )	mg/l	IS 3025 (Part 21)	200	600	175.59
14.	Calcium (as Ca)	mg/l	IS 3025 (Part 40)	75	200	54.3
15.	Magnesium (as Mg)	mg/l	IS 3025 (Part 46)	30	100	9.7
16.	Sulphate (as SO <sub>4</sub> )	mg/l	IS 3025 (Part 24)	200	400	21.6
17.	Nitrate (as NO <sub>3</sub> )	mg/l	APHA Method	45	No relaxation	13.68
18.	Copper (as Cu)	mg/l	IS 3025 (Part 2)	0.05	1.5	< 0.03
19.	Manganese (as Mn)	mg/l	IS 3025 (Part 2)	0.1	0.3	< 0.05
20.	Mercury (as Hg)	mg/l	IS: 3025 (Part 48)	0.001	No relaxation	< 0.0005
21.	Cadmium (as Cd)	mg/l	IS: 3025 (Part 41)	0.003	No relaxation	< 0.001
22.	Selenium (as Se)	mg/l	IS: 3025 (Part 56)	0.01	No relaxation	< 0.001
23.	Arsenic (as As)	mg/l	IS: 3025 (Part 37)	0.01	No relaxation	< 0.01
24.	Aluminium (as Al)	mg/l	IS: 15302	0.03	0.2	< 0.005
25.	Lead (as Pb)	mg/l	IS: 3025 (Part 47)	0.01	No relaxation	< 0.001
26.	Zinc (as Zn)	mg/l	IS 3025 (Part 2)	5	15	1.3



#### Details of Salient Features

Sr. No	Test Parameter	Measurement Unit	Test Method	As per IS 10500 : 2012 (Drinking Water - Specification)				
			rest method	Acceptable Limit	*Permissible Limit	Test Result		
27.	Nickel (as Ni)	mg/l	IS 3025 (Part 2)	0.02	No relaxation	< 0.01		
28.	Total Chromium (as Cr)	mg/l	IS 3025 (Part 2)	0.05	No relaxation	< 0.03		
29.	Barium (as Ba)	mg/l	Annexure F of IS 13428	0.7	No relaxation	< 0.01		
30.	Ammonia (as N)	mg/l	IS 3025 (Part 34)	0.5	No relaxation	< 0.1		
31.	Sulphide (as H <sub>2</sub> S)	mg/l	IS 3025 (Part 29)	0.05	No relaxation	< 0.03		
32.	Chloramines (as Cl <sub>2</sub> )	mg/l	APHA 4500-CI'G	4.0	No relaxation	< 0.05		
33.	Molybdenum (as Mo)	mg/l	IS 3025 (Part 2)	0.07	No relaxation	< 0.001		
34.	Silver (as Ag)	mg/l	Annexure J of IS 13428	0.1	No relaxation	< 0.001		
35.	Polychlorinated Biphenyls (PCB)	рд/І	USEPA 508	0.5	No relaxation	< 0.03		
36.	Boron (as B)	mg/l	IS 3025 (Part 2)	0.5	2.4	< 0.1		
37.	Mineral Oil	mg/l	IS 3025 (Part 39)	0.5	No relaxation	< 0.001		
38.	Tri Halo Methane							
	a. Bromoform		APHA 6232	0.1	No relaxation	Absent		
	b. Dibromochloromethane			0.1	No relaxation	Absent		
	c. Bromodichloromethane	mg/l		0.06	No relaxation	Absent		
	d.Chloroform			0.2	No relaxation	Absent		
39.	Phenolic compounds (as C <sub>6</sub> H <sub>5</sub> OH)	mg/l	IS 3025 (Part 43) :1001	0.001	0.002	< 0.001		
40.	Anionic detergents (as MBAS)	mg/l	IS 13428:2005 (Annex K)	0.2	1.0	< 0.01		
41.	Polynuclear aromatic hydrocarbon (PAH)	µg/I	USEPA: 550	0.1	No relaxation	< 0.03		
42.	Total coliform	Per 100 ml	_ IS 15185	Absent	Absent	Absent		
43.	Escherichia coli	Per 100 ml	IS 15185 : 2016	Absent	Absent	Absent		



#### Details of Salient Features

Sr. No.	Test Parameter	Measurement Unit	Test Method	As per IS 10500 : 2012 (Drinking Water - Specification)	Test Result
44.	Pesticides residues				
i,	Alpha-HCH	µg/l	USEPA 508	0.01	< 0.01
ii.	Beta HCH	µg/l	USEPA 508	0.04	< 0.03
iii.	Delta- HCH	µg/l	USEPA 508	0.04	< 0.03
iv.	Alachlor	µg/l	USEPA 508	20	< 0.03
٧.	Aldrin /Dieldrin	µg/l	USEPA 508	0.03	< 0.03
vi.	Atrazine	µg/l	USEPA 1657	2	< 0.03
vii.	Butachlor	µg/l	USEPA 508	125	< 0.03
viii.	Chlorpyrifos	µg/l	USEPA 1657	30	< 0.03
ix.	DDT and its Isomers	µg/l	USEPA 508	1	< 0.03
X.	Gamma - HCH (Lindane)	µg/l	USEPA 508	2	< 0.03
xi.	2,4-Dichlorophenoxyacetic acid	µg/l	USEPA 1657	30	< 0.03
xii.	Endosulphan	µg/l	USEPA 508	0.4	< 0.03
xiii.	Ethion	µg/l	USEPA 1657	3	< 0.03
xiv.	Isoproturon	µg/l	USEPA 1657	9	< 0.03
XV.	Malathion	µg/l	USEPA 1657	190	< 0.03
xvi.	Methyl Parathion	µg/l	USEPA 1657	0.3	< 0.03
kvii.	Monocrotophos	µg/l	USEPA 1657	1	< 0.03
viii.	Phorate	µg/l	USEPA 1657	2	< 0.03

NOTES: 

Please see watermark "Original Test Report" to confirm the authenticity of this report. 

Results shall be referred to tested sample(s) and applicable to tested parameters only. 

Test report shall not be reproduced except in full without prior written approval of Anacon Labs. 

Liability of Anacon Labs is limited to invoiced amount only. 

Non-perishable and perishable sample(s) shall be disposed off after 30 days and 15 days respectively from the date of issue of Test Report, unless specified otherwise. 

#Permissible limit in absence of an alternate source for drinking water. 

MPN indicates most probable number. 

"mg/l" is equivalent to 'ppm". 

"mg/l" is equivalent to 'ppm". 

"mg/l" is equivalent to 'ppm". 

ND-Not detected 

Result for test no. 7 is not relevant.

**REMARKS:** Based upon request of the party, sample was tested for above mentioned parameters only. Sample complies with IS:10500:2012, for test conducted, indicating that it is fit for drinking purpose with respect to tested parameters.

For ANACON LABORATORIES PVT. LTD.

Verified by

**Authorized Signatory** 

Ms. Roshani Thakur (Chemist) Dr. (Mrs.) S.D. Garway (Director - Labs)



#### Details of Salient Features

#### Table 8

## Monthly Report on Chemical Examination of Surface Water (Average of Three Months October-November-December-2018) (Nalahs near Mining Area)

#### TEST RESULTS

Sr. No.	Test Parameter	Measurement Unit	Test Method	As per IS 10500 : 2012 (Drinking Water - Specification)		
or, No.				Acceptable Limit	*Permissible	Test Result
1.	pH value		IS 3025 (Part 11)	6.5 to 8.5	No relaxation	6.82 at 25°C
2.	Turbidity	NTU	IS 3025 (Part 10)	1	5	1.3
3.	Colour	Hazen units	IS 3025-(Part 4)	5	15	3
4.	Odour		IS 3025 (Part 5)	Agreeable	Agreeable	Agreeable
5.	Taste		IS 3025 (Part 8)	Agreeable	Agreeable	Agreeable
6.	Iron (as Fe)	mg/l	IS 3025 (Part 2)	1.0	No relaxation	0.24
7.	Free residual chlorine	mg/l	IS 3025 (Part 26)	Min. 0.2	1	< 0.1
8.	Total dissolved solids	mg/l	IS 3025 (Part 16)	500	2000	349
9.	Fluoride (as F)	mg/l	IS 3025 (Part 60)	1.0	1.5	0.28
10.	Cyanide (as CN)	mg/l	IS 3025 (Part 27)	0.05	No relaxation	< 0.005
11.	Chloride (as CI)	mg/l	IS 3025 (Part 32)	250	1000	112.54
12.	Total Alkalinity (as CaCO <sub>3</sub> )	mg/l	IS 3025 (Part 23)	200	600	131.68
13.	Total hardness (as CaCO <sub>3</sub> )	mg/l	IS 3025 (Part 21)	200	600	263.72
14.	Calcium (as Ca)	mg/l	IS 3025 (Part 40)	75	200	81.62
15.	Magnesium (as Mg)	mg/l	IS 3025 (Part 46)	30	100	14.53
16.	Sulphate (as SO <sub>4</sub> )	mg/l	IS 3025 (Part 24)	200	400	23.81
17.	Nitrate (as NO <sub>3</sub> )	mg/l	APHA Method	45	No relaxation	14.76
18.	Copper (as Cu)	mg/l	IS 3025 (Part 2)	0.05	1.5	< 0.03
19.	Manganese (as Mn)	mg/l	IS 3025 (Part 2)	0.1	-0.3	< 0.05
20.	Mercury (as Hg)	mg/l	IS: 3025 (Part 48)	0.001	No relaxation	< 0.0005
21.	Cadmium (as Cd)	mg/l	IS: 3025 (Part 41)	0.003	No relaxation	< 0.001
22.	Selenium (as Se)	mg/l	IS: 3025 (Part 56)	0.01	No relaxation	< 0.001
23.	Arsenic (as As)	mg/l	IS: 3025 (Part 37)	0.01	No relaxation	< 0.01
24.	Aluminium (as Al)	mg/l	IS: 15302	0.03	0.2	< 0.005
25.	Lead (as Pb)	mg/l	IS: 3025 (Part 47)	0.01	No relaxation	< 0.001
26.	Zinc (as Zn)	mg/l	IS 3025 (Part 2)	5	15	1.4



#### Details of Salient Features

Sr. No	Test Parameter ·	Measurement Unit		As per IS 10500 : 2012 (Drinking Water - Specification)				
			Test Method	Acceptable Limit	*Permissible Limit	Test Result		
27.	Nickel (as Ni)	mg/l	IS 3025 (Part 2)	0.02	No relaxation	< 0.01		
28.	Total Chromium (as Cr)	mg/l	IS 3025 (Part 2)	0.05	No relaxation	< 0.03		
29.	Barium (as Ba)	mg/l	Annexure F of IS 13428	0.7	No relaxation	< 0.01		
30.	Ammonia (as N)	mg/l	IS 3025 (Part 34)	0.5	No relaxation	< 0.1		
31.	Sulphide (as H <sub>2</sub> S)	mg/l	IS 3025 (Part 29)	0.05	No relaxation	< 0.03		
32.	Chloramines (as Cl <sub>2</sub> )	mg/l	APHA 4500-CI'G	4.0	No relaxation	< 0.05		
33.	Molybdenum (as Mo)	mg/l	IS 3025 (Part 2)	0.07	No relaxation	< 0.001		
34.	Silver (as Ag)	mg/l	Annexure J of IS 13428	0.1	No relaxation	< 0.001		
35.	Polychlorinated Biphenyls (PCB)	µg/l	USEPA 508	0.5	No relaxation	< 0.03		
36.	Boron (as B)	mg/l	IS 3025 (Part 2)	0.5	2.4	< 0.1		
37.	Mineral Oil	mg/l	- IS 3025 (Part 39)	0.5	No relaxation	< 0.001		
38.	Tri Halo Methane							
	a. Bromoform		APHA 6232	0.1	No relaxation	Absent		
	b. Dibromochloromethane			0.1	No relaxation	Absent		
	c. Bromodichloromethane	mg/l		0.06	No relaxation	Absent		
	d.Chloroform			0.2	No relaxation	Absent		
39.	Phenolic compounds (as C <sub>6</sub> H <sub>5</sub> OH)	mg/l	IS 3025 (Part 43) :1001	0.001	0.002	< 0.001		
40.	Anionic detergents (as MBAS)	mg/l	IS 13428:2005 (Annex K)	0.2	1.0	< 0.01		
41.	Polynuclear aromatic hydrocarbon (PAH)	µg/l	USEPA: 550	0.1	No relaxation	< 0.03		
42.	Total coliform	Per 100 ml	IS 15185	Absent	Absent	1600		
43.	Escherichia coli	Per 100 ml	IS 15185 : 2016	Absent	Absent	Absent		



#### Details of Salient Features

Sr. No.	Test Parameter	Measurement Unit	Test Method	As per IS 10500 : 2012 (Drinking Water - Specification)	Test Result
44.	Pesticides residues	CONTRACTOR OF THE PARTY OF	W. Carlotte		
i.	Alpha-HCH	µg/l	USEPA 508	0.01	< 0.01
ii.	Beta HCH	µg/l	USEPA 508	0.04	< 0.03
iii,	Delta- HCH	µg/l	USEPA 508	0.04	< 0.03
iv.	Alachlor	µg/l	USEPA 508	20	< 0.03
V.	Aldrin /Dieldrin	µg/l	USEPA 508	0.03	< 0.03
vi.	Atrazine	µg/l	USEPA 1657	2	< 0.03
vii.	Butachlor	µg/l	USEPA 508	125	< 0.03
viii.	Chlorpyrifos	µg/l	USEPA 1657	30	< 0.03
ix.	DDT and its Isomers	µg/l	USEPA 508	1	< 0.03
X.	Gamma - HCH (Lindane)	µg/l	USEPA 508	2	< 0.03
xi.	2,4-Dichlorophenoxyacetic acid	µg/l	USEPA 1657	30	< 0.03
xii.	Endosulphan	µg/l	USEPA 508	0.4	< 0.03
xiii,	Ethion	µg/l	USEPA 1657	3	< 0.03
xiv.	Isoproturon	µg/l	USEPA 1657	9	< 0.03
XV.	Malathion	µg/l	USEPA 1657	190	< 0.03
xvi.	Methyl Parathion	µg/l	USEPA 1657	0.3	< 0.03
xvii.	Monocrotophos	µg/l	USEPA 1657	1	< 0.03
cviii.	Phorate	µg/l	USEPA 1657	2	< 0.03

NOTES: • Please see watermark "Original Test Report" to confirm the authenticity of this report. • Results shall be referred to tested sample(s) and applicable to tested parameters only. • Test report shall not be reproduced except in full without prior written approval of Anacon Labs. • Liability of Anacon Labs is limited to invoiced amount only. • Non-perishable and perishable sample(s) shall be disposed off after 30 days and 15 days respectively from the date of issue of Test Report, unless specified otherwise. • #Permissible limit in absence of an alternate source for drinking water. • MPN indicates most probable number. • 'mg/l' is equivalent to 'ppm'. • 'ug/l' is equivalent to 'ppb'. • '<' indicates detection limit of instrument/method and shall be considered as 'absent'. • ND-Not detected • Result for test no. 7 is not relevant.

REMARKS: Based upon request of the party, sample was tested for above mentioned parameters only.




Details of Salient Features

# Table 9 Report on Soil Analysis, Kudaq Date of collection: December-2018 Sample Location: (Old Kudag/Mining Area)

Sr. No.	Test Parameter	Measurement Unit	S1 Old Kudag/Mining Area
1.	PH (1:5 water extract)		6.73 at 25°C
2.	Electrical Conductivity at 25°C (1:5 water extract)	μs/cm	172.9
3.	Texture	S Marine Land	Silty Clay
4.	Sand	%	34.52
5.	Slit	%	26.19
6.	Clay	%	39.29
7.	Water Holding Capacity	%	32.58
8.	Bulk Density	g/cc	1.21
9.	Porosity	%	11.54
10.	Exchangeable Calcium (as Ca)	mg/Kg	516.24
11.	Exchangeable Magnesium (as Mg)	mg/Kg	137.92
12.	Exchangeable Manganese (as Mn)	mg/Kg	84.27
13.	Exchangeable Zinc (as Zn)	mg/Kg	42.58
14.	Available Boron (as B)	mg/Kg	ND
15.	Water Soluble Chloride (as Cl +)	mg/Kg	429.21
16.	Water Soluble Sulphate (as SO4)	mg/Kg	382.76
17.	Available Potassium (as K)	mg/Kg	403.94
18.	Available Phosphorous (as P)	Kg/hec	12.54
19.	Available Nitrogen (as N)	Kg/hec	128.76
20.	Cadmium (as Cd)	mg/Kg	ND
21.	Chromium (as Cr)	mg/Kg	ND
22.	Copper (as Cu)	mg/Kg	0.06
23.	Lead (as Pb)	mg/Kg	ND
24.	Total Iron	mg/Kg	12.34
25.	Organic Matter	%	1.31
26.	Organic Carbon	%	0.42
27.	CEC	meq/100g	12.43

**Note:** 1. Results relate to tested sample only. 2. Test report should not be reproduced partially. 3. 'mg/Kg' is equivalent to 'ppm'. 4. 'g/100g' is equivalent to '%w/w'. 5. All parameters are in 1:5 water extract.

REMARKS: Based upon request of party, sample was tested for above mentioned parameter only.

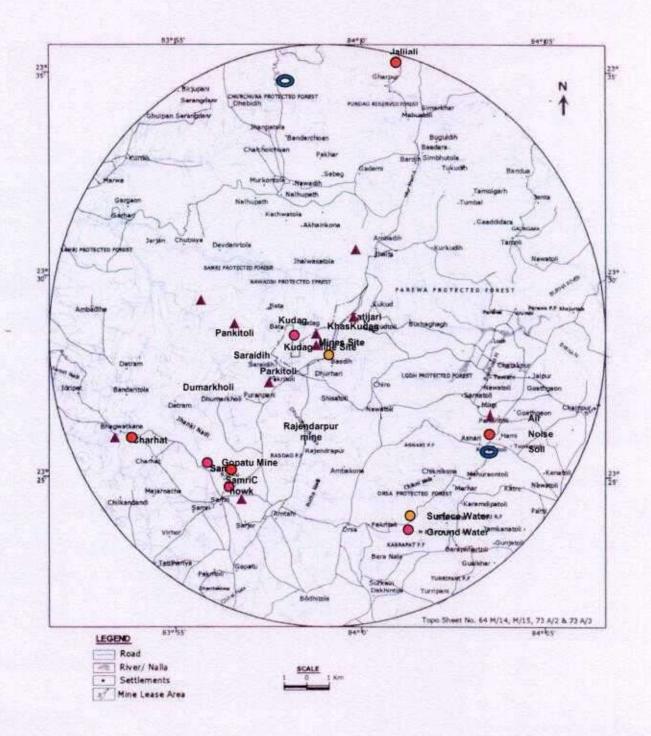

Sampling Locations for Water